

PART NUMBER
IPCDS-RWB-U

CATEGORY
DISPLAYS

Features

Display

Multi-color LED scrolling text and pixel graphics. 1-line or 2-line display.

Microphone

Hands-free two-way intercom.

Flasher

One red, one white, one blue LED flasher.
Individually controlled.

Audio

Two 4" high-efficiency speakers.
Audio coverage up to 600ft² on each side.

Peripheral Integration

Connect a strobe, motion sensor, electronic lock, call button, etc.

Software

ClockWise Campus software included.
Compatible with approved third-party software.

SIP Integration

SIP-enabled. Easily interfaces with VoIP / SIP phone systems.

Light Sensor

Auto-dimming display.




Product Overview

Enhance notification in corridors and hallways using the PoE DoubleSided IP Display (Universal Mount). Display countdown timers and announcements using multi-colored text, LED flashers, and two 4 inch speakers that can be seen and heard from both sides of the device.

The universal mount provides the option to mount from the wall or ceiling. The IPCDS-RWB-U easily integrates with VoIP phone systems, approved 3rd party software, and includes ClockWise Campus software with purchase.

Dimensions

(Dimensions are subject to change.)

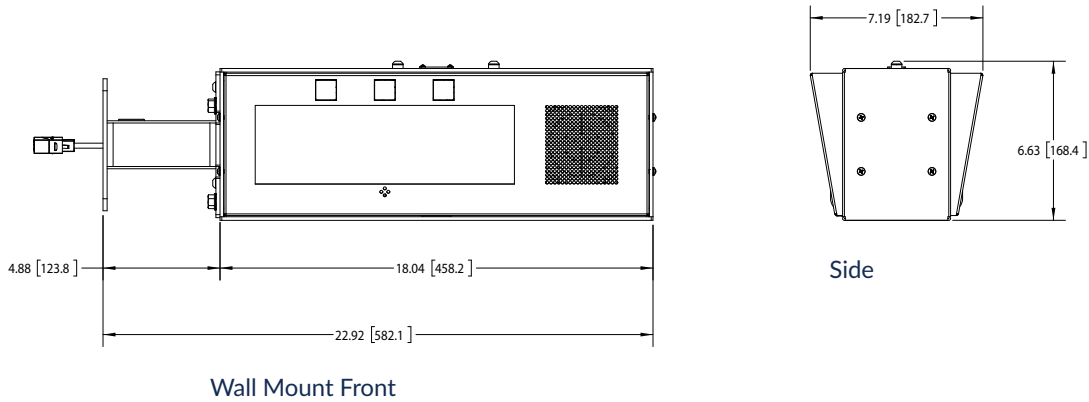

Category	Specifications
Power Input	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W (recommended)
Ethernet I/F	10/100 Mbps
Speaker Size	4"
Audio Power	8 W / 16 W
Frequency Response	150 Hz - 17 kHz
Audio Payload Types	G.711, A-law and μ -law, PCM
Average Sensitivity	94dB, 1W / 1 M
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
General Purpose Interface	2 GPI: 1 on-board, Phoenix connector via bare wire, 2 via on-board header (J13) 1 GPO: Contact Closure or 12 VDC / 15 VDC via AND-PIA-2D
Audio Interface	Analog Line Out via AND-PIA-2D; Analog Line In via AND-PIA-2D
Operating Temperature	14° TO 122° F (-10° TO 50° C
Dimensions	Wall Mount: 22.9" W x 6" H x 7" D (including mount) Ceiling Mount: 18" W x 11.5" H x 7" D (including mount)
Weight	94dB, 1W / 1 M
Warranty	6 Year Limited*

(Due to continual product development, specifications are subject to change without notice.)

*Applies to eligible ANetD hardware devices purchased on or after February 1, 2026. See warranty for details.



Contact Us

- 847.463.2236
- sales@anetd.com
- 3820 N Ventura Drive
Arlington Heights, IL 60004
- anetd.com

