

PART NUMBER
IPSCM

CATEGORY
SPEAKERS

Features

Audio

8" high-efficiency speaker.
Audible up to 10ft radius
(standard 10ft ceiling).

Microphone

Hands-free two-way intercom.

Peripheral Integration


Connect to ANetD's Call Button Kit with
Microphone (BTN-KIT-MIC-ND).

Software

ClockWise Campus software included.
Compatible with approved third-party
software.

SIP Integration

SIP-enabled.
Easily interfaces with
VoIP / SIP phone systems.

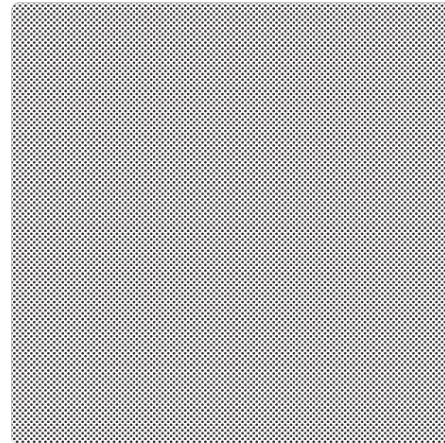


Product Overview

Designed as a drop-in replacement for a standard 2' x 2' ceiling tile, the PoE Square Ceiling IP Speaker (IPSCM) easily integrates with VoIP phone systems (SIP-enabled) to broadcast announcements in offices, hallways, classrooms, or any space with a drop ceiling that needs audio notification.

The IPSCM also integrates with approved third-party software and includes ClockWise Campus software with purchase.

Dimensions

(Dimensions are subject to change.)

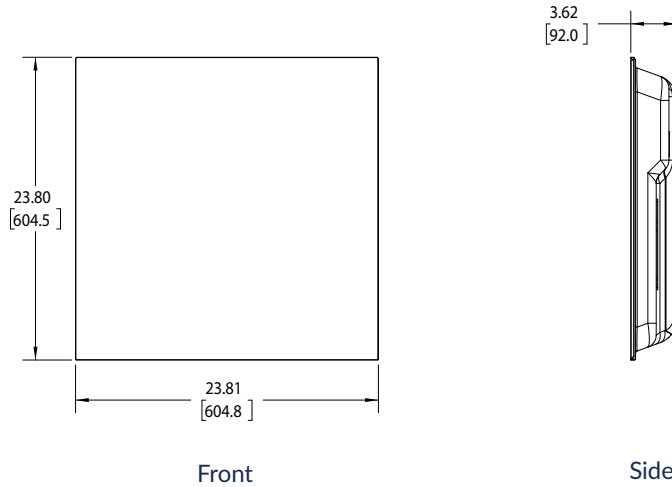

Category	Specifications
Power Input	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W
Ethernet I/F	10/100 Mbps
Speaker Size	8 W / 16 W
Audio Power	60 Hz - 17 kHz
Frequency Response	G.711, A-law and μ -law, PCM
Audio Payload Types	95dB, 1W / 1 M
Average Sensitivity	95dB, 1W / 1 M
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
General Purpose Interface	1 GPI: 1 via 6P6C RJ-12
Operating Temperature	14° TO 122° F (-10° TO 50° C)
Dimensions	24" W x 24" H x 3.4" D
Weight	6.5 lbs (2.95 kg)
Warranty	6 Year Limited*

(Due to continual product development, specifications are subject to change without notice.)

*Applies to eligible ANetD hardware devices purchased on or after February 1, 2026. See warranty for details.



Contact Us

847.463.2236

sales@anetd.com

3820 N Ventura Drive
Arlington Heights, IL 60004

anetd.com

