

PART NUMBER
IPSCM-RMe

CATEGORY
SPEAKERS

Features

Audio

8" high-efficiency speaker.
Audible up to 10ft radius
(standard 10ft ceiling).

Peripheral Integration


Connect a call button.

Software

ClockWise Campus software included.
Compatible with approved third-party
software.

SIP Integration

SIP-enabled.
Easily interfaces with
VoIP / SIP phone systems.

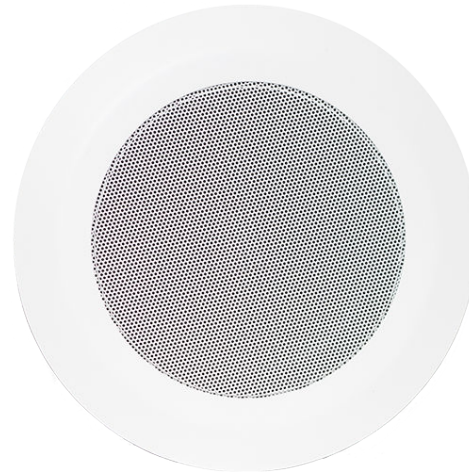


Product Overview

Broadcast announcements in offices, hallways, or classrooms with the PoE Round Ceiling IP Speaker. The IPSCM-RMe is enabled for the Button Kit with Microphone (BTN-KIT-MIC-ND), which facilitates two-way communication.

The IPCSM-RMe also integrates with approved 3rd party software and includes ClockWise Campus software with purchase.

Dimensions

(Dimensions are subject to change.)

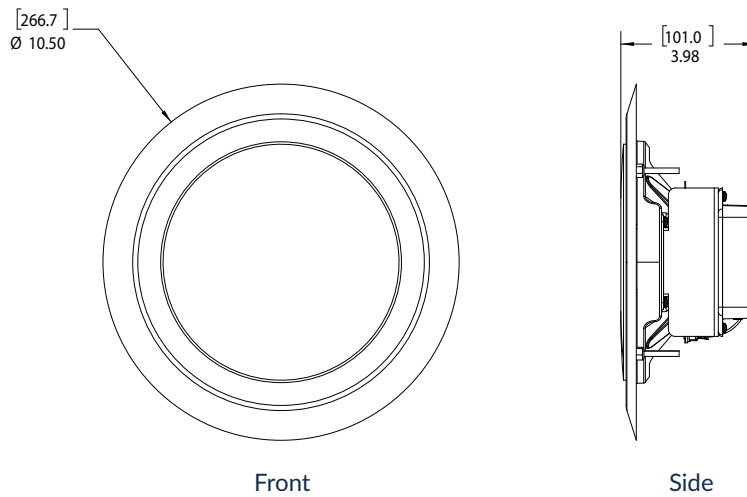

Category	Specifications
Power Input	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W
Ethernet I/F	10/100 Mbps
Audio Power	8 W / 16 W
Frequency Response	60 Hz - 17 kHz
Audio Payload Types	G.711, A-law and μ -law, PCM
Average Sensitivity	95dB, 1W / 1 M
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
General Purpose Interface	2 GPI: 1 via RJ-11, 1 via Cable Harness
Operating Temperature	14° TO 122° F (-10° TO 50° C)
Dimensions	10.5" diameter x 3.68" deep
Weight	4 lbs (1.8 kg)
Warranty	6 Year Limited*



Model: IPSCM-8M
Advanced Network Devices
www.anetd.com
Confirms to UL STD 6950-1
Cert. to CAN/CSA STD C22.2 #60950-1
42.19/07.09/0C 25.18/06a
802.3af PoE+

(Due to continual product development, specifications are subject to change without notice.)

*Applies to eligible ANetD hardware devices purchased on or after February 1, 2026. See warranty for details.



Contact Us

- 847.463.2236
- sales@anetd.com
- 3820 N Ventura Drive
Arlington Heights, IL 60004
- anetd.com

