

PART NUMBER  
IPSTROBE-I

---

CATEGORY  
STROBES

## Features

### Software

ClockWise Campus software included.  
Compatible with approved third-party software.

### SIP Integration

SIP-enabled.  
Easily interfaces with  
VoIP / SIP phone systems.




## Product Overview

Capture attention and enhance emergency alerting with the PoE Indoor IP Strobe (IPSTROBE-I).

The IPSTROBE-I easily integrates with VoIP phone systems, approved 3rd party software, and includes ClockWise Campus software with purchase.

# Dimensions

(Dimensions are subject to change.)

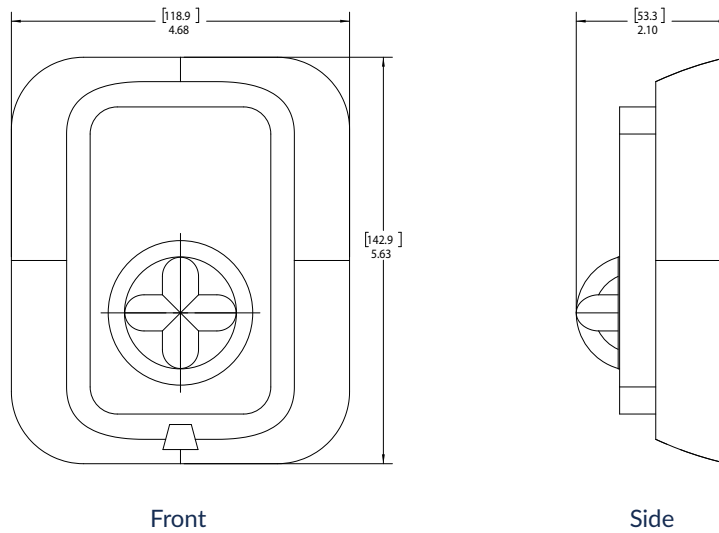

Category	Specifications
Power Input	PoE (IEEE802.3af) 15.4 W
Ethernet I/F	10/100 Mbps
Flash Rate	1 Flash per second
Luminous Intensity	15, 30, 75, 95, 110, 135, or 185 Candela
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
Humidity Range	10 to 93% Non-condensing
Operating Temperature	14° TO 122° F (-10° TO 50° C)
Dimensions	Strobe: 4.7" W x 5.57" H x 1.9" D Module: 3.34" W x 1.11" H x 2.56"D
Weight	2 lbs (0.91 kg)
Warranty	6 Year Limited*

(Due to continual product development, specifications are subject to change without notice.)

\*Applies to eligible ANetD hardware devices purchased on or after February 1, 2026. See warranty for details.



**Contact Us**

- 847.463.2236
- sales@anetd.com
- 3820 N Ventura Drive  
Arlington Heights, IL 60004
- anetd.com

