

PART NUMBER  
IPSWS-SM

---

CATEGORY  
SPEAKERS

## Features

### Audio

8" high-efficiency speaker.  
Audio coverage up to 600ft<sup>2</sup>.

### Microphone

Hands-free two-way intercom.

### Peripheral Integration


Connect to ANetD Call Button with  
Microphone (BTN-KIT-MIC-ND).

### Software

ClockWise Campus software included.  
Compatible with approved third-party  
software.

### SIP Integration

SIP-enabled.  
Easily interfaces with  
VoIP / SIP phone systems.

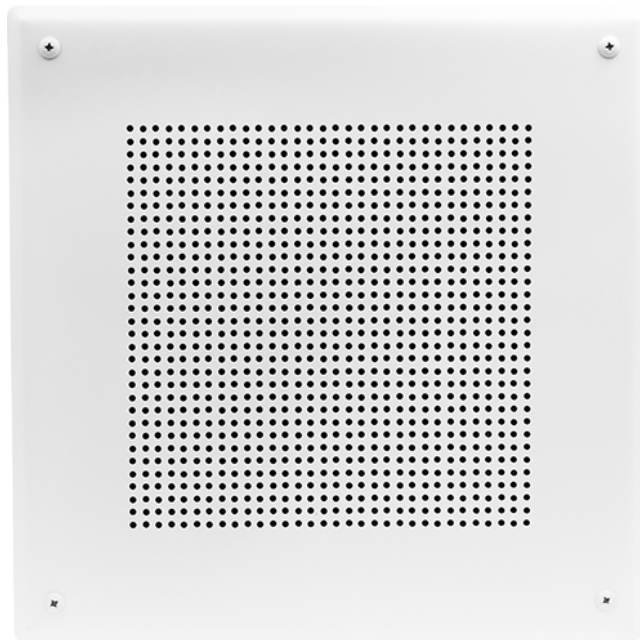


## Product Overview

Broadcast announcements in offices, hallways, classrooms, or any indoor space needing audio notification and two-way intercom with the PoE Surface-Mount IP Speaker.

The IPSWS-SM easily integrates with VoIP phone systems, approved 3rd party software, and includes ClockWise Campus software with purchase.

# Dimensions

(Dimensions are subject to change.)

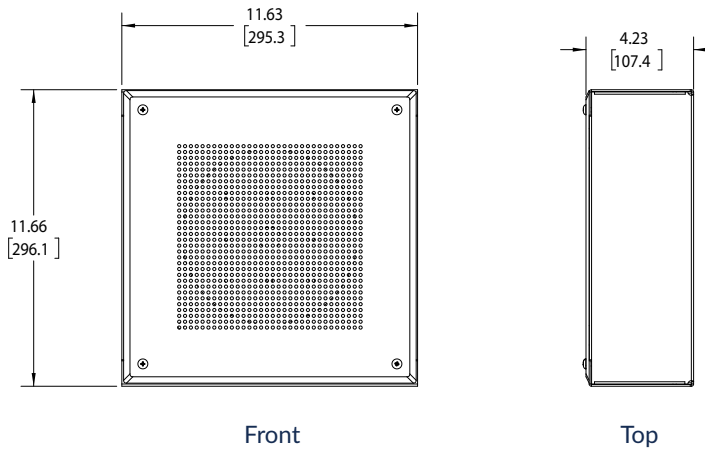

Category	Specifications
Power Input	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W
Ethernet I/F	10/100 Mbps
Speaker Size	8 W / 16 W
Audio Power	8"
Frequency Response	600 Hz - 14 kHz
Audio Payload Types	G.711, A-law and $\mu$ -law, PCM
Average Sensitivity	95dB, 1W / 1 M
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
General Purpose Interface	2 GPI: 1 via RJ-11, 1 via Cable Harness 1 GPI: 1 via 6P6C RJ-12
Material	Wiremold combination 5700 knockout for 500 and 700 series raceways
Operating Temperature	14° TO 122° F (-10° TO 50° C)
Dimensions	11.63" W x 11.63" H x 4.16" D
Weight	9 lbs (4.1 kg)
Warranty	6 Year Limited*



(Due to continual product development, specifications are subject to change without notice.)

\*Applies to eligible ANetD hardware devices purchased on or after February 1, 2026. See warranty for details.



**Contact Us**

- 847.463.2236
- sales@anetd.com
- 3820 N Ventura Drive  
Arlington Heights, IL 60004
- anetd.com

